

Emergency Bulkhead



Venture Lighting LED Emergency Bulkheads provide over 3 hours of maintained or non-maintained emergency lighting.

An exit legend is supplied as standard, allowing the bulkhead to operate as an illuminated emergency exit sign.



Photometric Data

Part Code	Lumens	LPW	Rated Life (Hrs)	CCT (K)	CRI (Ra)	Beam (°)	Emergency Duration (Hrs)
EMG012	155	38	30,000	6500	70	150	>3
EMG019	180 (AC) 120 (DC)	56	30,000	6500	70	150	>3

Electrical Data

Part Code	Input (W)	Input (V) ±10%	Input (Hz)	LED (W)	Input (A)	Electrical Class	Power Factor	THD (%)
EMG012	5 (Charging)	220-240	50/60	3 (AC) 2 (DC)	0.05 (Charging)	2	>0.8	<20
EMG019	3.2 (Charging)	220-240	50/60	1 (AC) 0.8 (DC)	0.05 (Charging)	1	>0.25	<70


Physical Data

Part Code	Lens Type	Case Material	Dimensions (mm)	Weight (kg)
EMG012	Polycarbonate	ABS	60 x 110 x 345	0.46
EMG019	Polycarbonate	ABS	60 x 110 x 276	0.49


Environmental Data

Max. Ambient (°C)	40
Min. Ambient (°C)	0
IP Rating	65

Emergency Bulkhead

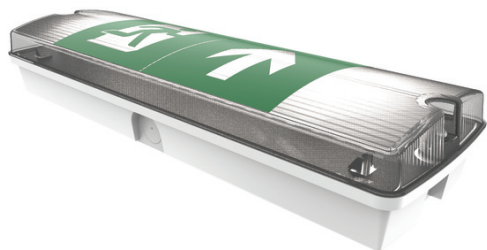

EMG012

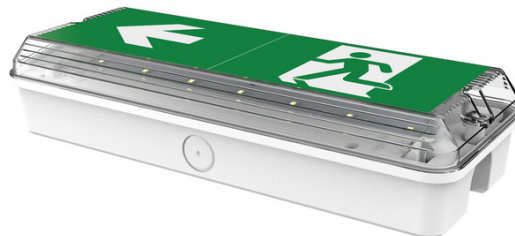

EMG019