



The Venture **LED LoBay** offers up to 65% energy saving compared to traditional HID products. The product comes with a clear diffuser as standard and is suitable mounting heights up to 8 metres.



50,000
Hours




Years
Warranty



Photometric Data

Part Code	Lumens	LPW	Rated Life (Hrs)	L80 B50 @ Ta Max (Hrs)	CCT (K)	CRI (Ra)	Beam (°)
IND123	12,100	111	50,000	>50,000	5000	>80	Wide
IND124	16,500	115	50,000	>50,000	5000	>80	Wide

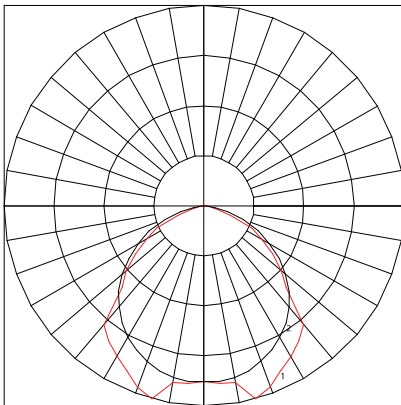

1 - Vertical Plane Through Horizontal Angles (0° - 180°) (Through Max. Cd.)
 # 2 - Vertical Plane Through Horizontal Angles (90° - 270°)

Accessories

ACS018 Midibay Trunking Mounting Bracket Kit

Environmental Data

Max. Ambient (°C)	40
Min. Ambient (°C)	-25
IP Rating	IP20

Electrical Data

Part Code	Input (W)	Input (V) ±10%	Input (Hz)	Input (A)	Electrical Class	Inrush (A) (Ipeak)	No. per C16	Power Factor	THD (%)
IND123	109	220-240	50/60	0.61	1	60	15	>0.9	<15
IND124	144	220-240	50/60	0.8	1	60	15	>0.9	<15

Physical Data

Part Code	Lens Type	Case Material	Reflector	Dimensions (mm)	Weight (kg)	Connector Type Input
IND123	Clear Polycarbonate	Steel	MIRO 4	600mm x 400mm x 57mm	4.3	2m Lead + Socket
IND124	Clear Polycarbonate	Steel	MIRO 4	600mm x 400mm x 57mm	4.3	2m Lead + Socket