



Midibay Professional is a suspension or surface mount LED luminaire, designed for indoor industrial lighting applications. This luminaire is available with a range of options including DALI dimmable, high or low level sensors & emergency. Trunking mounting brackets available (ACS018).



50,000
Hours




5
Years
Warranty



Photometric Data

Part Code	Lumens	LPW	Rated Life (Hrs)	L80 B50 @ Ta Max (Hrs)	CCT (K)	CRI (Ra)	Beam (°)
IND076	12,100	111	50,000	>50,000	5000	>80	Wide
IND077	16,500	115	50,000	>50,000	5000	>80	Wide
IND078	21,600	120	50,000	>50,000	5000	>80	Wide
IND079	26,600	122	50,000	>50,000	5000	>80	Wide
IND076-DC	10,900	100	50,000	>50,000	5000	>80	Wide
IND077-DC	14,800	102	50,000	>50,000	5000	>80	Wide
IND078-DC	19,400	108	50,000	>50,000	5000	>80	Wide
IND079-DC	23,900	110	50,000	>50,000	5000	>80	Wide

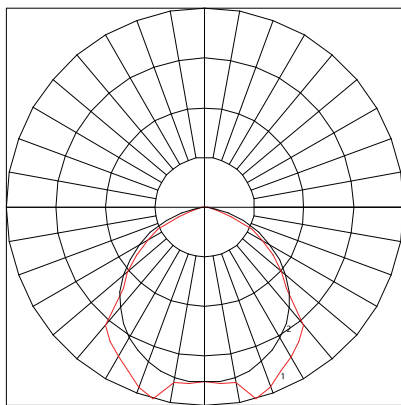

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)

Midibay Pro - 110 degree distribution

Product Builder

- CD DALI Dimmable
- EM Emergency (IND076/77 only)
- SH Sensor High Level (Up to 20m detection height)
- SL Sensor Low Level (Up to 8m detection height)
- DC Diffuser Coated

Add suffixes to build product:

Eg. IND076-CD-DC-SH

(100W Midibay Pro, DALI Dimmable
with Coated Diffuser & Sensor High Level)

Electrical Data

Part Code	Input (W)	Input (V) ±10%	Input (Hz)	LED (W)	Input (A)	Electrical Class	Inrush (A) (I _{peak})	No. per C16	Power Factor	THD (%)
IND076	109	220-240	50/60	100	0.61	1	60	15	>0.9	<15
IND077	144	220-240	50/60	135	0.8	1	60	15	>0.9	<15
IND078	179	220-240	50/60	168	1.0	1	100	10	>0.9	<15
IND079	217	220-240	50/60	200	1.2	1	100	8	>0.9	<15

Physical Data

Part Code	Lens Type	Case Material	Reflector	Dimensions (mm)	Weight (kg)	Connector Type Input
IND076	Clear Polycarbonate	Steel	MIRO 4	600mm x 400mm x 57mm	4.3	2m Lead + Socket
IND077	Clear Polycarbonate	Steel	MIRO 4	600mm x 400mm x 57mm	4.3	2m Lead + Socket
IND078	Clear Polycarbonate	Steel	MIRO 4	600mm x 540mm x 57mm	4.5	2m Lead + Socket
IND079	Clear Polycarbonate	Steel	MIRO 4	600mm x 540mm x 57mm	4.5	2m Lead + Socket

Environmental Data

Max. Ambient (°C)	40
Min. Ambient (°C)	-25
IP Rating	IP20

General Data

ECA Compliant	Yes
---------------	-----

Accessories

ACS018	Midibay Trunking Mounting Bracket Kit
--------	---------------------------------------



IND076 / 077



Midibay with Diffuser



IND078 / 079