

LED Fire Rated Downlight



Low energy, low maintenance Fire Rated Downlights. Independantly certified in the UK to meet 30-60-90 minute classification.

Fixed angle downlights provide discreet accent lighting for offices and showrooms.



50,000
Hours



7 Years
Warranty




LED Fire Rated Downlight



Photometric Data

Part Code	Lumens	LPW	Rated Life (Hrs)	L80 B50 @ 25C (Hrs)	CCT (K)	CRI (Ra)	Beam (°)	UGR
DWL014	700	88	50,000	>50,000	3000	>80	38	<19
DWL015	750	94	50,000	>50,000	4000	>80	38	<19

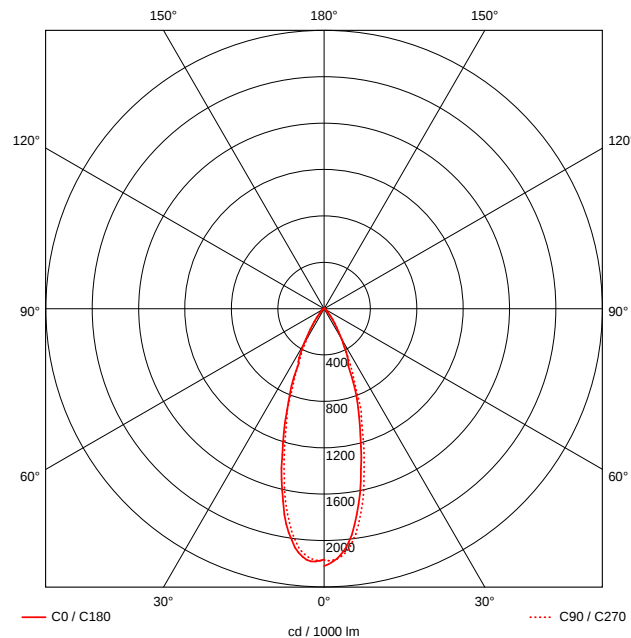

Electrical Data

Part Code	Input (W)	Input (V) ±10%	Input (Hz)	LED (W)	Input (A)	Electrical Class	Inrush (A) (Ipeak)	No. per C16	Power Factor	THD (%)
DWL014	8	220-240	50/60	6.5	0.08	2	50	52	>0.85	<20
DWL015	8	220-240	50/60	6.5	0.08	2	50	52	>0.85	<20

LED Fire Rated Downlight

Physical Data


Part Code	Lens Type	Case Material	Dimensions (mm)	Cutout Size	Weight (kg)
DWL014	Glass	Aluminium	Dia 90 x 50	73	0.55kg
DWL015	Glass	Aluminium	Dia 90 x 50	73	0.55kg

Environmental Data

Max. Ambient (°C)	45
Min. Ambient (°C)	-10
IP Rating	IP65

Accessories

ACS097	110mm White Ceiling adaptor for Fire Rated Downlight
ACS096	Chrome Bezel for Fire Rated Downlight
ACS095	Brushed Chrome Bezel for Fire Rated Downlight

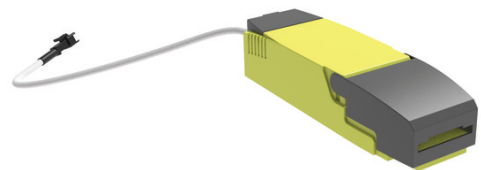

Driver for Downlight